
HANSARONDA single-lever kitchen mixer, DN 15 extractable hand spray

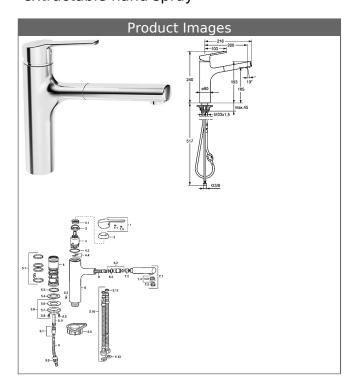

Description

HANSARONDA single-lever kitchen mixer, DN 15 extractable hand spray

P-IX 28283/IO

flow rate: 9 l/min, at 3 bar hydraulic pressure

- body: DR brass (MS 63)
- Surfaces in contact with drinking water contain less than 0.3% lead.
- watercourse system without nickel coating
- operating lever (metal)
- (-) H+C symbol
- aerator
- (-) improved limescale protection with the $\operatorname{HONEYCOMB}^{\circledast}$ structure
- extractable hand spray
- (-) hose for extractable shower, 1400 mm
- connection with flexible hoses G 3/8 (-) DVGW W270 approved
- fastening with thread collar
- installation for work surfaces up to 45 mm
- protected against back-flow in domestic use (according to DIN EN 1717)
- DVGW in preparation

spout: 150° swivel range projection: 200 mm

HANSA control cartridge classic 3.5

Item No.: 59913075

Qty: 1

(-) ceramic discs with integrated grease wells

(-) adjustable hot water stop

(-) volume restrictor indefinitely variable up to approx. 6 l/min

HANSA control cartridge classic 3.5

Item No.: 59913075

Qty: 1

- (-) ceramic discs with integrated grease wells
- (-) adjustable hot water stop

(-) volume restrictor indefinitely variable up to approx. 6 l/min







