

KWC

Swiss Water Experience

KWC
INTRO

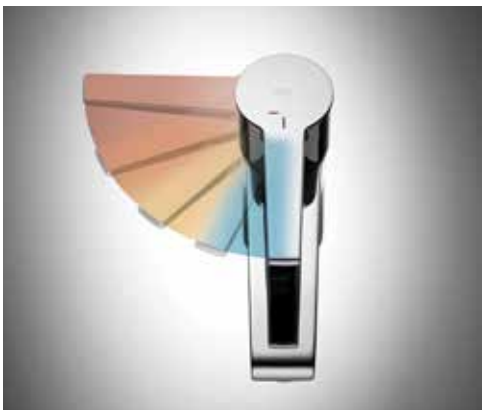






Quin-
tessential
quality

KWC INTRO is the perfect proof that outstanding quality does not have to be expensive. Enjoy the comfort and convenience of a faucet that is intuitive and ergonomic to use in any circumstance. KWC INTRO sets a new, sophisticated standard – and offers true value for money.



Cool and controlled

The faucet helps to raise your awareness of how you use water. Thanks to the energy-saving coolfix® technology, cold rather than lukewarm water flows when the lever is in its central position, which inevitably reduces your hot water consumption.



Water constantly under your control



Neoperl® Caché® SSR E

With a Neoperl® Caché® SSR E swivelling jet regulator integrated into the spout, you can change the direction and angle of the jet of water to suit your needs – if the water is hitting the basin at an inconvenient angle for washing your hands, for instance.

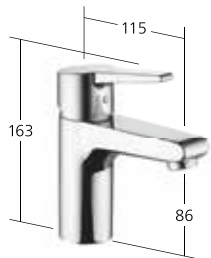




Versatile and full of character



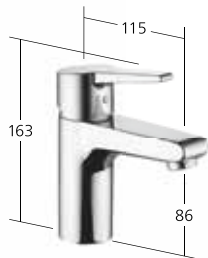
With its small but sophisticated product range, KWC INTRO leaves nothing to be desired. Whether it is used for a basin, shower or tub, this faucet line opens up all the design possibilities you could possibly want in your bathroom.

**Basin**

Lever mixer
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.168.041.000FL all chrome
A 115, with pop-up valve
12.168.051.000FL all chrome
A 115, without pop-up valve

Flow rate 6 l/min (3 bar)

**Basin**
Cold water flow in central lever position

Lever mixer
coolfix® – cold water flow in central lever
position
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.161.031.000FL all chrome
A 115, with pop-up valve
12.161.071.000FL all chrome
A 115, without pop-up valve


Flow rate 6 l/min (3 bar)

**Basin**

Lever mixer
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.168.042.000FL all chrome
A 145, with pop-up valve
12.168.052.000FL all chrome
A 145, without pop-up valve

Flow rate 6 l/min (3 bar)

**Basin**
Cold water flow in central lever position

Lever mixer
coolfix® – cold water flow in central lever
position
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.161.032.000FL all chrome
A 145, with pop-up valve
12.161.072.000FL all chrome
A 145, without pop-up valve

Flow rate 6 l/min (3 bar)

**Basin**

Lever mixer
– Fixed spout
– Neoperl® Perlator® SSR,
swivelling jet regulator

12.168.092.000FL all chrome
A 145, without pop-up valve


Flow rate 6 l/min (3 bar)

**Bidet**

Lever mixer
– Fixed spout
– Ball joint aerator Neoperl® Cascade®

13.161.041.000FL all chrome
A 110, with pop-up valve

Flow rate 7,5 l/min (3 bar)



Tub

Lever mixer
– Fixed spout

20.162.313.000 all chrome
AD 150 +/- 15 mm, A 154, without hand shower, hose and bracket

Flow rate 20 l/min (3 bar)

Spray outlet:
Flow rate 18 l/min (3 bar)

Tub

Trim kit with function unit
– Outflow top and below

20.164.580.000 all chrome
20.164.590.000 all chrome
With vacuum breaker

To be ordered separately:
Unit for concealed installation
KWC VAROX 1/2" **39.999.300.931**,
with shut-off valves

Shower

Lever mixer

21.162.330.000 all chrome
AD 150 +/- 15 mm, without hand shower and hose

Spray outlet:
Flow rate 18 l/min (3 bar)

Shower

Trim kit with function unit
– Outflow top or below

21.164.580.000 all chrome

To be ordered separately:
Unit for concealed installation
KWC VAROX 1/2" **39.999.300.931**,
with shut-off valves



Accessories

Bathtub spout
– Fixed spout
– Neoperl® Perlator®
– Connecting thread 1/2"

26.001.073.000 all chrome

Flow rate 27 l/min (3 bar)

Accessories

Hand shower KWC FIT-S
– touchcontrol – hand shower does not become hot
– Cleaning-friendly faceplate – fitjet
– Connecting thread 1/2"

26.000.113.000 all chrome

Flow rate 12 l/min (3 bar)

Accessories

Shower hose
– Secure against twisting: rotatable (long) cone
– Made of plastic
– Connecting thread 1/2"

26.001.004.000 all chrome
L 1800

